



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

William Morell

Dated 10 May 2005

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

GB 0221706.5

By virtue of a direction given under Section 32 of the Patents Act 1977, the application is proceeding in the name of:

VETCO GRAY CONTROLS LIMITED,
2 High Street,
Nailsea,
BRISTOL,
BS48 1BS,
United Kingdom


Incorporated in the United Kingdom,

[ADP No. 08927220001]

~~Incorporated in the United Kingdom,~~

~~[ADP No. 08901696001]~~

THIS PAGE BLANK (USPTO)

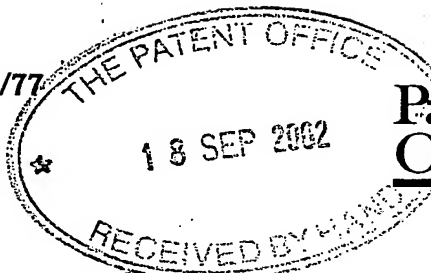

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	MJN/67945/000	19SEP02 E749373-3 D01914 P01/7700 0.00-0221706.5
2. Patent application number (The Patent Office will fill in this part)	0221706.5	
3. Full name, address and postcode of the or of each applicant (underline all surnames)	ABB Offshore Systems Limited 2 High Street Nailsea Bristol BS48 1BS Patents ADP number (if you know it) If the applicant is a corporate body, give the country/state of its incorporation	
	United Kingdom (GB) SECTION 32 (1977 ACT) APPLICATION FILED 7/9/04 7692221001	
4. Title of the invention	PRESSURE SENSING APPARATUS	
5. Name of your agent (if you have one)	PAGE HARGRAVE	
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Southgate, Whitefriars Lewins Mead BRISTOL BS1 2NT	
Patents ADP number (if you know it)	05996483001	
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)
		Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:	Yes	
a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	4
Claim(s)	2
Abstract	1 <i>DMC</i>
Drawing(s)	2 + 2

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	Two ✓
Request for preliminary examination and search (Patents Form 9/77)	One ✓
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11. I/We request the grant of a patent on the basis of this application.

Signature

M J Hargrave
PAGE HARGRAVE

Date 17/09/02

12. Name and daytime telephone number of person to contact in the United Kingdom


Mr M J Newstead (0117) 927 6634

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

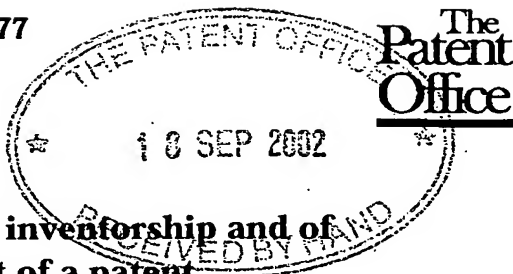


7/77

**Statement of inventorship and of
right to grant of a patent**

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	MJN/67945/000
2. Patent application number <i>(if you know it)</i>	0221706.5
3. Full name of the or of each applicant	ABB Offshore Systems Limited
4. Title of the invention	PRESSURE SENSING APPARATUS
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By virtue of a contract of employment between the applicant and the inventor.
6. How many, if any, additional Patents Forms 7/77 are attached to this form? <i>(see note (c))</i>	
7.	<p>I/We believe that the person(s) named over the page <i>(and on any extra copies of this form)</i> is/are the inventor(s) of the invention which the above patent application relates to.</p> <p>Signature  Date 17/09/02</p> <p style="text-align: center;">PAGE HARGRAVE</p>
8. Name and daytime telephone number of person to contact in the United Kingdom	Mr M J Newstead (0117) 927 6634

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

James Brian Wilson
2 Russett Grove
Nailsea
North Somerset BS48 4GB
United Kingdom (GB)

3724523003

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder

Have you signed the form?

Patents Form 7/77

PRESSURE SENSING APPARATUS

The present invention relates to pressure sensing apparatus, for example for sensing pressure in a fluid extraction well such as a hydrocarbon extraction well.

5

Fig. 1 shows, diagrammatically in section, typical existing pressure sensing apparatus as an assembly 1 fitted in a hydrocarbon production fluid extraction well. The assembly 1 is typically attached to the wall of a fluid extraction pipe 2 via a flange 3. In order to prevent the fluid flow of wellbore product whose pressure is to be sensed from contaminating and blocking the pressure sensing aperture, a flush diaphragm 4 is fitted over the aperture, the diaphragm hydraulically connecting to a remote pressure sensor 5, in the example a quartz device, via a hydraulic, oil filled, very small bore, tubing 6 and hydraulic oil in a cavity 7 defined by a funnel 8. The pressure sensor 5 is located close to an electronic unit 9 which contains an oscillator for the quartz device and converts the electrical output of the pressure sensor 5 into a form suitable for transmission remotely from the assembly 1. The hydraulic tube 6 connecting the diaphragm 4 to the pressure sensor 5 is typically fitted with a facility 10 to evacuate it and permit filling the tube with hydraulic fluid. The pressure sensor 5 and electronic unit 9 are mounted at the cool end of the assembly 1 (that is in a cool environment, e.g. sea water, as compared with the inside of pipe 2), in order to maximise the life of the assembly.

A problem with such pressure sensor assemblies is that there is a differential thermal expansion between the tube 6 and the hydraulic fluid in the tube, causing errors in pressure measurements. Although some attempt is often made to compensate for this by adjustment in the electronics, this is generally inadequate, particularly under transient conditions, leaving significant errors in pressure measurement.

According to the present invention, there is provided pressure sensing apparatus comprising:

30

pressure responsive means; and

hydraulic connecting means hydraulically connecting the pressure responsive means with pressure sensing means which produces an indication of sensed pressure, wherein:

the hydraulic connecting means comprises a tubular member and a longitudinal insert in the tubular member with hydraulic fluid in the tubular member between the insert and the member, the tubular member, the insert and the hydraulic fluid and the dimensions of the tubular member and the insert being such that the pressure transmitted hydraulic fluid to the sensing means in use of the apparatus is substantially independent of temperature changes.

Preferably, the tubular member is metallic.

The insert may be in the form of a rod.

Preferably, the volumetric coefficient of thermal expansion of the material of the tubular member is less than that of the hydraulic fluid and greater than that of the material of the insert. For example, the volumetric coefficient of thermal expansion of the material of the tubular member could be substantially $30 \times 10^{-6}/^{\circ}\text{C}$, that of the material of the insert substantially $0.5 \times 10^{-6}/^{\circ}\text{C}$ and that of the hydraulic fluid substantially $300 \times 10^{-6}/^{\circ}\text{C}$, the insert occupying substantially 95% of the internal volume of the tubular member.

The pressure responsive means could comprise a diaphragm.

The pressure sensing means could comprise a pressure sensor and electronic circuitry connected with it.

Fig. 2 shows a sectioned view of a metal tube 11 for use instead of tube 6 in Fig. 1. The tube 11 is made of metal with a volumetric thermal co-efficient of expansion of typically $30 \times 10^{-6}/^{\circ}\text{C}$. Inserted in the tube 11 is a longitudinal insert in the form of a rod 12, typically made of silica, which is smaller in diameter than the inner diameter of the tube 11 and has, typically, a volumetric thermal co-efficient of $0.5 \times 10^{-6}/^{\circ}\text{C}$. The annular space 13, between the tube 11 and the rod 12, is filled with hydraulic fluid (e.g.

oil) which, typically, has a volumetric thermal co-efficient of expansion of $300 \times 10^{-6}/^{\circ}\text{C}$. When the temperature of the tube 11 increases, the volume of space 13 increases in dependence on the difference between the volumetric thermal co-efficients of expansion of the tube 11 and the rod 12. The internal diameter of the tube 11 and diameter of the rod 12 are arranged such that the increase of volume of space 13 for a given rise in temperature substantially matches the increase in space of the hydraulic oil filling this volume, for the same temperature rise. As the two volume increases substantially match, there is substantially no change in pressure applied by the hydraulic fluid due to a temperature rise, irrespective of the length of the tube 11. The same situation applies to a fall in temperature of the tube 11. Thus, the hydraulic fluid will transmit the pressure from a diaphragm to a pressure sensor substantially without errors resulting from temperature changes of the tube 11, the pressure transmitted by the fluid being substantially independent of temperature. Typically, with the examples of temperature co-efficients quoted, the rod 12 will need to occupy substantially 95% of the internal volume of the metal tube 11. The percentages can be calculated once the precise expansion rates for the actual choice of the different materials employed to implement the tube 11 and rod 12 are known.

The above temperature compensation of pressure changes due to thermal changes is irrespective of the overall diameter of tube 11, which can be of any diameter required. Thus it can be made large enough to remove the problems of contamination blockages of the very small bore tubes traditionally needed, by ensuring that the space 13 for the hydraulic fluid is substantial.

Fig. 3, in which items which correspond with those in Fig. 1 have the same reference numerals, shows pressure sensing apparatus in the form of an assembly 14 in which, instead of a small bore tubing 6, there is a tube 11 with a rod 12 as described above, hydraulically connecting diaphragm 4 with pressure sensor 5. Longitudinal expansion of the tube 11 and rod 12 can be accommodated by appropriate mounting of the pressure sensor 5 and electronic unit 7.

Suitable materials for the rod insert 12 have a very low coefficient of thermal expansion

and are incompressible at the working pressure of the assembly 14. Although silica is one such material, there may also be other suitable materials such as some grades of glass (Pyrex) and ceramic and some exotic metals (Invar) that can perform the required function equally as well.

CLAIMS

1. Pressure sensing apparatus comprising:
pressure responsive means; and
5 hydraulic connecting means hydraulically connecting the pressure responsive means with pressure sensing means which produces an indication of sensed pressure, wherein:
the hydraulic connecting means comprises a tubular member and a longitudinal insert in the tubular member with hydraulic fluid in the tubular member
10 between the insert and the member, the tubular member, the insert and the hydraulic fluid and the dimensions of the tubular member and the insert being such that the pressure transmitted the hydraulic fluid to the sensing means in use of the apparatus is substantially independent of temperature changes.
- 15 2. Apparatus according to claim 1, wherein the tubular member is metallic.
3. Apparatus according to claim 1 or 2, wherein the insert is in the form of a rod.
- 20 4. Apparatus according to any preceding claim, wherein the volumetric coefficient of thermal expansion of the material of the tubular member is less than that of the hydraulic fluid and greater than that of the material of the insert.
- 25 5. Apparatus according to claim 4, wherein the volumetric coefficient of thermal expansion of the material of the tubular member is substantially $30 \times 10^{-6}/^{\circ}\text{C}$, that of the material of the insert is substantially $0.5 \times 10^{-6}/^{\circ}\text{C}$, that of the hydraulic fluid is substantially $300 \times 10^{-6}/^{\circ}\text{C}$ and the insert occupies substantially 95% of the internal volume of the tubular member.
- 30 6. Apparatus according to any preceding claim, wherein the pressure responsive means comprises a diaphragm.
7. Apparatus according to any preceding claim, wherein the pressure sensing

means comprises a pressure sensor and electronic circuitry connected with it.


ABSTRACT

5 Pressure sensing apparatus (14) comprises pressure responsive means (4) and hydraulic
connecting means (11, 12, 13) hydraulically connecting the pressure responsive means
with pressure sensing means (5, 9) which produces an indication of sensed pressure.
The hydraulic connecting means comprises a tubular member (11) and a longitudinal
10 insert (12) in the tubular member with hydraulic fluid in the tubular member between
the insert and the member, the tubular member, the insert and the hydraulic fluid and the
dimensions of the tubular member and the insert being such that the pressure transmitted
the hydraulic fluid to the sensing means in use of the apparatus is substantially
independent of temperature changes.

(Fig. 3)

15

THIS PAGE BLANK (USPTO)

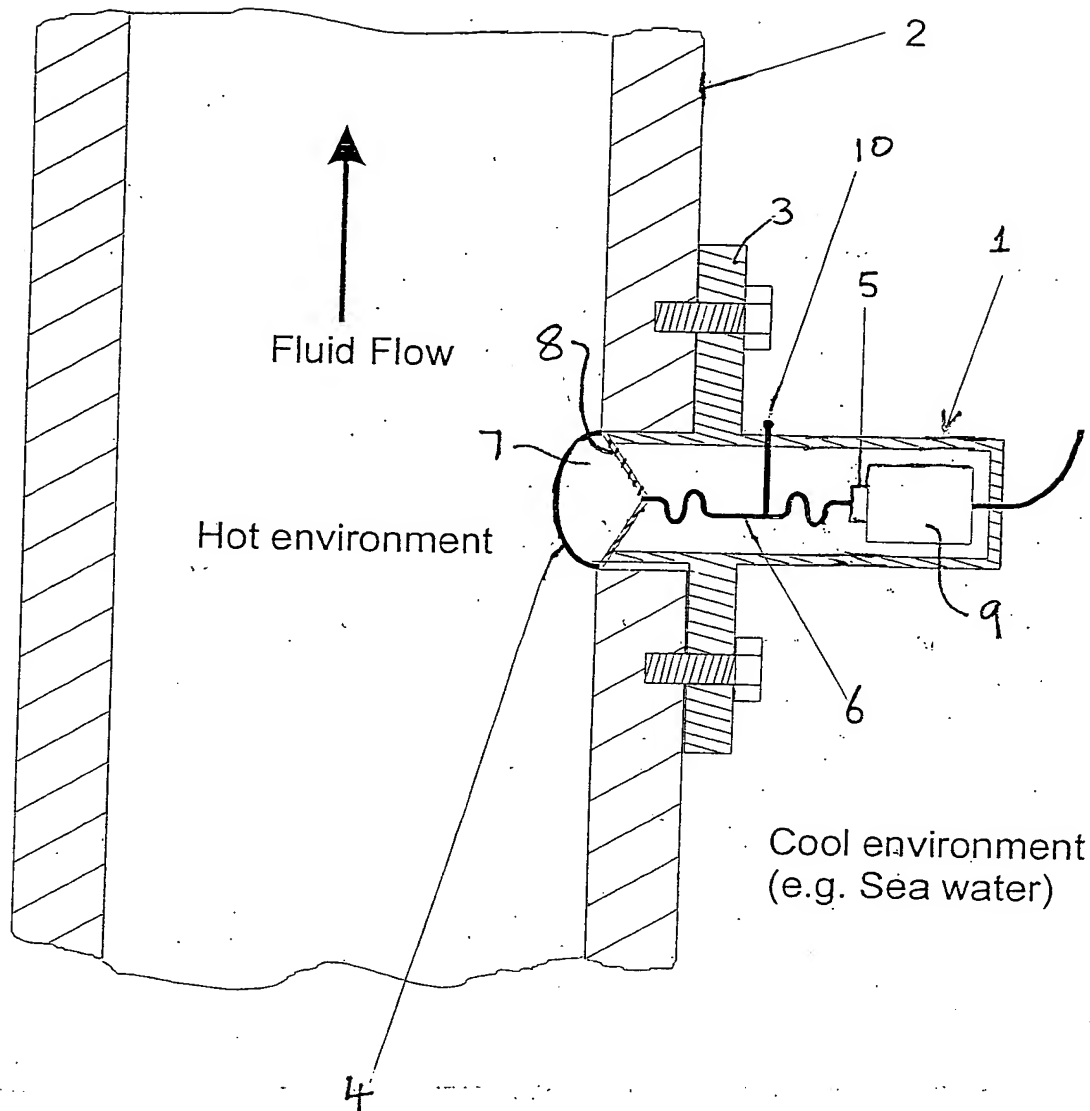Fig. 1

THIS PAGE BLANK (USPTO)

2/2

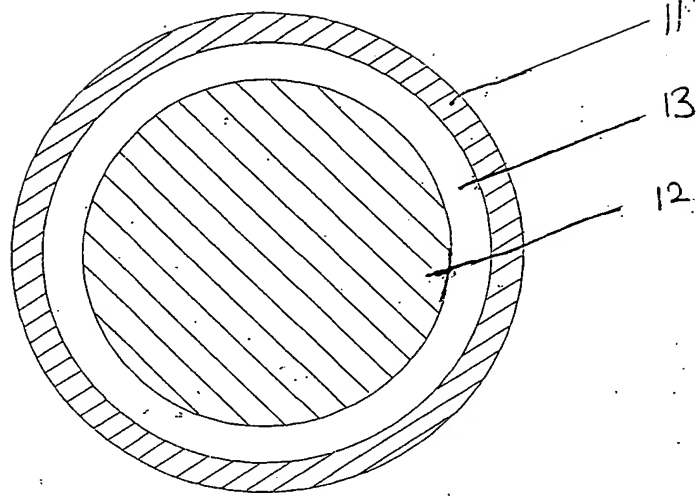


Fig. 2

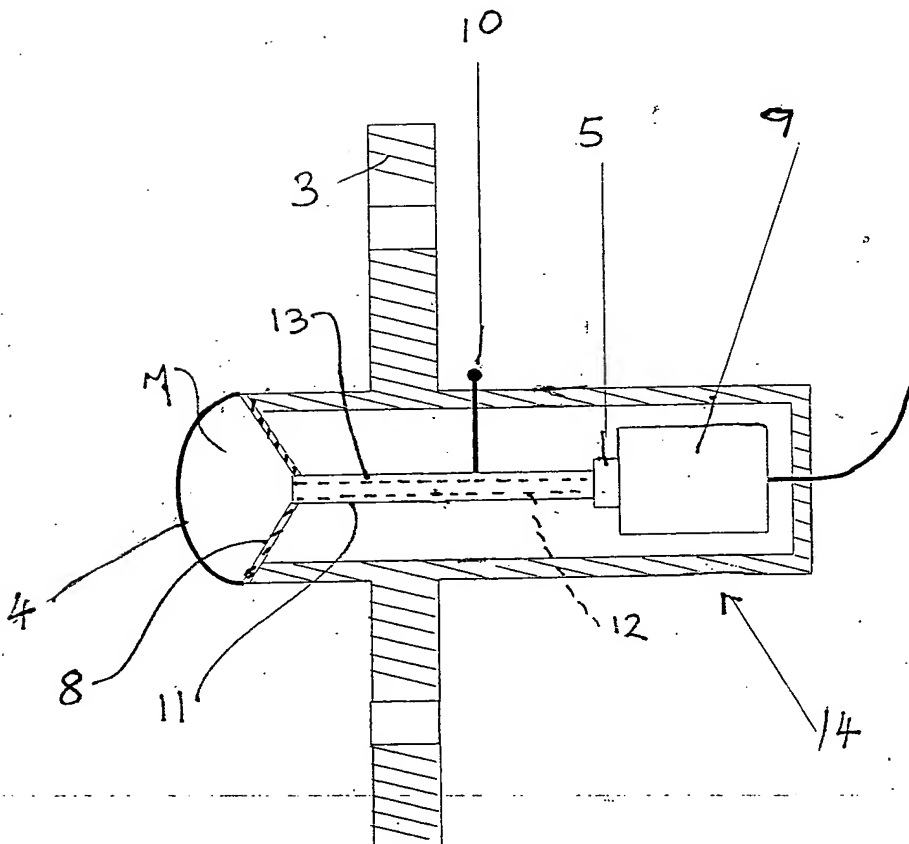


Fig. 3

THIS PAGE BLANK (USPTO)